

# FENESTRATION TESTING LABORATORY

1615 S. Campus Avenue • Ontario, CA 91761 • Ph. (909) 923-6260 • Fax (909) 923-6262

**JONES JOINERY PTY LTD**  
1 Wells Road  
Oakleigh, VIC 3166  
Australia

Report No. : W01D-134  
Date : July 31, 2001  
Page : 1 of 1

## TESTING SUMMARY


**SERIES:** LA CANTINA DOOR

**CONFIGURATION:** Four (4) panels: three (3) bi-fold (out) & one (1) single swing (out)


**FRAME SIZE:** 146.75" x 85.50"

<u>TEST DESCRIPTION</u>	<u>MEASURED</u>	<u>ALLOWED</u>
Air Infiltration (ASTM E 283) 1.57 PSF	0.01 CFM/Ft <sup>2</sup>	0.3 CFM/Ft <sup>2</sup>
Water Penetration (ASTM E 547) 3.00 PSF	No Leakage	No Leakage
Uniform Load Structural (ASTM E 330) 45.0 PSF POS	0.00"	0.32" Set
45.0 PSF NEG	0.00"	0.32" Set

Testing Completed: July 31, 2001

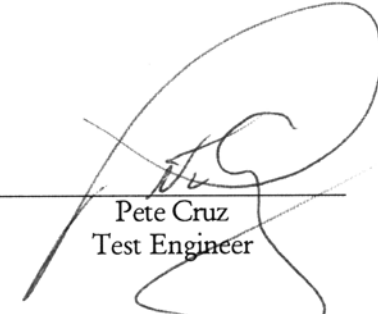

Pete Cruz  
Test Engineer

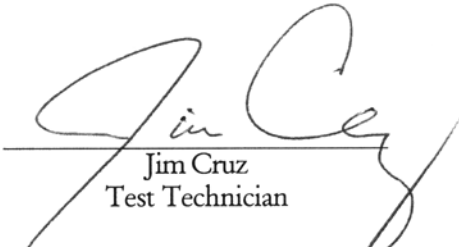

Jim Cruz  
Test Technician